LIGHTING SOLUTIONS

ARCHITECTURAL
COMMERCIAL
RESIDENTIAL

CYLO GT 25W

DOWNLIGHT








FEATURES

- Modular Design.
- System power up to 30W.
- Interchangeable beam.
- Interchangeable anti-glare reflector.
- 5-year guarantee.

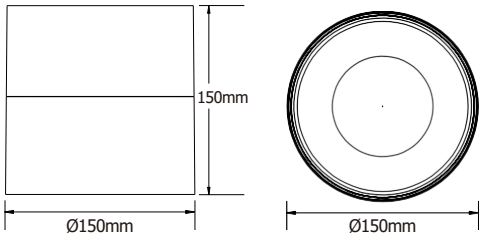

Technical Data

Input Voltage/Hz	AC200-240V 50/60Hz
Output Voltage/Current	DC36V/600mA
Power	23W
Rated Input Current	0.115A
PF value	>0.9
THD	<20%
Ingress Protection	IP20
Operating Temperature	-10—40°C
Dimmability	Non-dimmable with AcTEC driver

LED and Optical Data

LED Brand	Bridgelux COB LED
CRI	>90
SDCM	<3
Beam Angle	15°/24°/36°/60°
Colour temperature	2700K/3000K/4000K
System luminous efficacy up to 108lm/W	

Packaging

Box Dimensions	L155 x W155 x H200mm
Box Net Weight	1.55Kg
Box Gross Weight	1.82Kg
Carton Dimensions	L480 x W325 x H425 mm/12 PCS
Carton Net Weight	18.6Kg
Carton Gross Weight	22.5Kg

bridgelux LED

RoHS

Model	CCT		Beam Angle	Lumen	Efficacy	CRI R9-Value	Life Rating
LSD08-25-XX-01	2700K	CRI 90+	15°	1984lm	87lm/W	R9=72	105000H L90 B10
			24°	1986lm	87lm/W	R9=72	105000H L90 B10
			36°	2228lm	98lm/W	R9=70	105000H L90 B10
			60°	2234lm	97lm/W	R9=70	105000H L90 B10
LSD08-25-XX-01	3000K		15°	2195lm	95lm/W	R9=74	105000H L90 B10
			24°	2187lm	95lm/W	R9=74	105000H L90 B10
			36°	2389lm	103lm/W	R9=72	105000H L90 B10
			60°	2376lm	102lm/W	R9=73	105000H L90 B10
LSD08-25-XX-01	4000K		15°	2396lm	103lm/W	R9=73	105000H L90 B10
			24°	2353lm	102lm/W	R9=73	105000H L90 B10
			36°	2508lm	108lm/W	R9=70	105000H L90 B10
			60°	2517lm	108lm/W	R9=71	105000H L90 B10