LIGHTING SOLUTIONS

ARCHITECTURAL
COMMERCIAL
RESIDENTIAL


CYLO GT 15W

DOWNLIGHT



Black
White

White
Black
Golden
Black Chrome

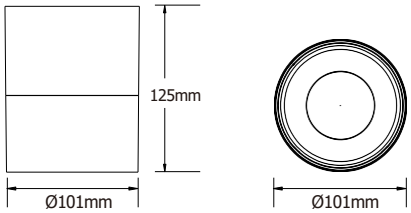

FEATURES

- Modular Design.
- System power up to 20W.
- Interchangeable beam.
- Interchangeable anti-glare reflector.
- 5-year guarantee.

Technical Data

Input Voltage/Hz	AC200-240V 50/60Hz
Output Voltage/Current	DC36V/850mA
Power	13.5W
Rated Input Current	0.0675A
PF value	>0.9
THD	<35%
Ingress Protection	IP20
Operating Temperature	-10—40℃
Dimmability	Non-dimmable with AcTEC driver

Optical Data

LED Brand	Bridgelux COB LED
CRI	Ra > 90
SDCM	<3
Beam Angle	15°/24°/36°/60°
Colour temperature	2700k/3000K/4000K

System luminous efficacy up to 103.2lm/W

Packaging

Box Dimensions	L105 x W105 x H170mm
Box Net Weight	0.72Kg
Box Gross Weight	0.82Kg
Carton Dimensions	L435 x W330 x H365 mm/24 PCS
Carton Net Weight	17.28Kg
Carton Gross Weight	20.5Kg

bridgelux LED

RoHS

Model	CCT		Beam Angle	Lumen	Efficacy	CRI R9-Value	Life Rating
LSD08-15-XX-01	2700K	CRI 90+	15°	1153lm	87.8lm/W	R9=67	105000H L90 B10
			24°	1182lm	89.5lm/W	R9=67	105000H L90 B10
			36°	1153lm	86.4lm/W	R9=66	105000H L90 B10
			60°	1116lm	84lm/W	R9=67	105000H L90 B10
LSD08-15-XX-01	3000K		15°	1218lm	91.7lm/W	R9=73	105000H L90 B10
			24°	1240lm	93.5lm/W	R9=73	105000H L90 B10
			36°	1242lm	92.1lm/W	R9=72	105000H L90 B10
			60°	1172lm	88.6lm/W	R9=73	105000H L90 B10
LSD08-15-XX-01	4000K		15°	1353lm	101.2lm/W	R9=72	105000H L90 B10
			24°	1351lm	103.2lm/W	R9=72	105000H L90 B10
			36°	1325lm	101.4lm/W	R9=71	105000H L90 B10
			60°	1248lm	95.2lm/W	R9=71	105000H L90 B10