LIGHTING SOLUTIONS

ARCHITECTURAL
COMMERCIAL
RESIDENTIAL

CYLO GT 35W

DOWNLIGHT




Black
White

White
Black
Golden
Black Chrome

FEATURES

- Modular Design.
- System power up to 40W.
- Interchangeable beam.
- Interchangeable anti-glare reflector.
- 5-year guarantee.

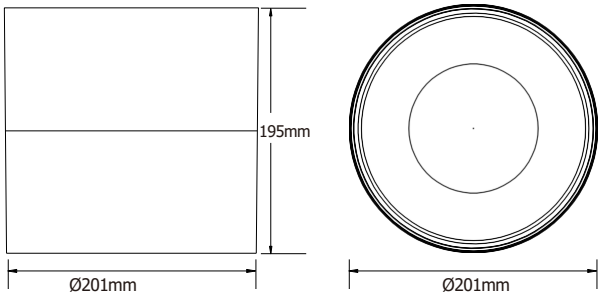

Technical Data

Input Voltage/Hz	AC200-240V 50/60Hz
Output Voltage/Current	DC36V/850mA
Power	32W
Rated Input Current	0.16A
PF value	>0.9
THD	<15%
Ingress Protection	IP20
Operating Temperature	-10—40℃
Dimmability	Non-dimmable with AcTEC driver

Optical Data

LED Brand	Bridgelux COB LED
CRI	Ra > 90
SDCM	<3
Beam Angle	15°/24°/36°/60°
Colour temperature	2700k/3000K/4000K

System luminous efficacy up to 95.41lm/W

Packaging

Box Dimensions	L206 x W206 x H250mm
Box Net Weight	3.04Kg
Box Gross Weight	4.1Kg
Carton Dimensions	L430 x W430 x H275 mm / 4 PCS
Carton Net Weight	12.16Kg
Carton Gross Weight	17.5Kg

bridgelux LED

RoHS

Model	CCT		Beam Angle	Lumen	Efficacy	CRI R9-Value	Life Rating
LSD08-35-XX-01	2700K	CRI 90+	15°	2585lm	81.1lm/W	R9=66	105000H L90 B10
			24°	2576lm	81.1lm/W	R9=66	105000H L90 B10
			36°	2746lm	82lm/W	R9=65	105000H L90 B10
			60°	2377lm	73.5lm/W	R9=69	105000H L90 B10
LSD08-35-XX-01	3000K		15°	2726lm	84.3lm/W	R9=72	105000H L90 B10
			24°	2749lm	86.3lm/W	R9=71	105000H L90 B10
			36°	2821lm	89.3lm/W	R9=71	105000H L90 B10
			60°	2501lm	79lm/W	R9=75	105000H L90 B10
LSD08-35-XX-01	4000K		15°	3022lm	95.4lm/W	R9=69	105000H L90 B10
			24°	2997lm	94.3lm/W	R9=69	105000H L90 B10
			36°	3035lm	95.41lm/W	R9=69	105000H L90 B10
			60°	2728lm	82.69lm/W	R9=73	105000H L90 B10